

THE WORLD LEADER IN CLEAN AIR SOLUTIONS

SAAFCarb™

ENGINEERED CHEMICAL MEDIA

- Quick and easy media changeovers
- Resists a wide range of impure gases
- Low pressure drop and high adsorptive capacity

Engineered Media

SAAFCarb engineered gas removal chemical media is designed to efficiently remove gaseous contaminants from airstreams.

Target contaminants include:

- Chlorine
- Nitrogen dioxide
- Volatile Organic Compounds (VOCs)

SAAFCarb media is a pelletized activated carbon media that removes toxic and impure contaminants from the atmosphere. The activated carbon is produced using select grades of bituminous coal and steam activated for optimum adsorption capacity.


Adsorptive Process

SAAFCarb media removes toxic and impure gases primarily by adsorption. In this process, the gases are held in the pellet pore volume by van der Waals' forces, as well as other forces.

Quality Control

SAAFCarb media undergoes the following quality control tests:

- Apparent Density
- Ball-pan Hardness
- CTC Activity
- Moisture Content
- Pellet Diameter

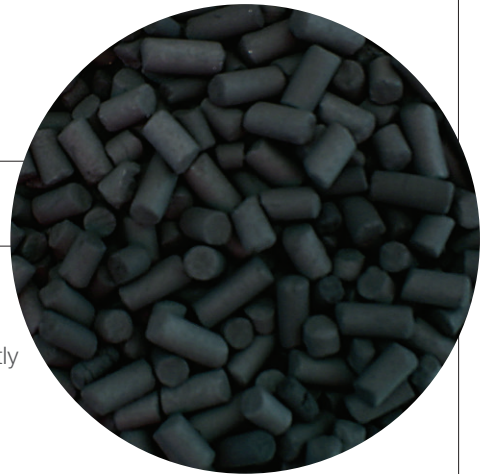

SAAFCarb™ Media

Typical Properties

| | |
|----------------------|---------------------------------------|
| Apparent density: | 500 kg/m ³ acc. ASTM D2854 |
| Carbon description: | Virgin |
| Carbon raw material: | Coal |
| CTC: | >60 wt % min |
| Hardness: | 95% minimum |
| Nominal diameter: | 3 mm |
| Shape: | Cylindrical pellet |

Disclaimer: Typical properties are produced using AAF and industry standard test methods. They are listed for informational purposes only and are not to be used as purchase specifications. Certificates of analysis are available for specific batches upon request.

Packaging Options and Application Guidelines

Packaging Options

SAAFCarb media is packaged in containers of 25 kg and big bags of 500 kg.

SAAFCarb media is also available packaged in SAAF cartridges, cassettes, and trays.

Application Guidelines

SAAFCarb media performs under the following application guidelines (actual capacities and efficiencies may vary):

- Temperature: -20° to 55 °C
- Humidity: 10%–95% RH
- Airflow: From 40 m³/h to over 170.000 m³/h
- Velocity: From 0,30 to 2,5 m/s

Installation and Disposal Requirements

Installation

The installers must use dust masks, safety goggles, and rubber gloves.

Disposal

The spent SAAFCarb media must be disposed of according to local and federal guidelines. MSDS included in each shipment.

Safety

Wet activated carbon adsorbs atmospheric oxygen, causing low oxygen supply in enclosed areas or packed containers. This can be potentially hazardous for workers who enter these oxygen-depleted areas. Make sure that workers adhere to the provincial and state safety guidelines.



AAF International
European Headquarters
Robert-Bosch-Straße 30-32, 64625 Bensheim
Tel: +49 6251 80368 – 0, Fax: +49 6251 80368 – 20
aafintl.com

AAF has a policy of continuous product research and improvement and reserves the right to change design and specifications without notice.

©2017 AAF International
and its affiliated companies.

ISO Certified Firm GPF_706_EN_052017